

# **Model:UT-6616M**

**10/100M TCP/IP to 16 Ports RS-485/422**

**Serial Device Server**

## **Datasheet**



### **UTEK TECHNOLOGY (SHENZHEN) CO., LTD.**

Add: Floor 8-10, Building 7, Skyworth Innovation Valley, No. 8, Tangtou No.1 Road, Shiyan Street, Shiyan Old Street, Bao 'an District, Shenzhen

Tel: +86-755-81202008

Fax: +86-755-27886083

Http: [www.uotek.com](http://www.uotek.com)

## 1. Overview

UT-6616M serial device server is a converter that converts asynchronous ports RS-485/422 to TCP/IP. It is an independent intelligent device with CPU, embedded OS, and full TCP/IP protocol. The bid-directional transparent transmission between RS-485/422 and Ethernet enables RS-485/422 serial devices access in Internet immediately.

## 2. Technical Parameters

### Hardware

- UNIX Fixedtty mechanism
- 16 serial ports, allows to connect with terminal, Modem, bar code machine, cash register, ISDN, terminal adapter, serial printer, Modem
- With Reset button
- Ethernet port 10/100M transmission rate, auto negotiation
- Provides with full signal: DCD, RXD, TXD, DTR, DSR, RTS, CTS, GND
- 32 bits embedded 100M CPU, 8M RAM
- LED indication for working status

### Software


- Support ARP, IP, ICMP, UDP, TCP, PPP, HTTP, TELNET, DNS, DHCP, PAP, CHAP.
- Support Windows extended Serial Mode
- Support UNIX host login mode
- Support DNS
- Support ARP
- Terminal server parameters configuration
- Support for status monitoring
- Support MODEM connection

Product model		UT-6616M
serial port number		16
CPU		32bit 100MHZ
RAM		8M
Serial port	Baud rate	50-460800bps
	Check bit	Nove,Odd, Even, Mark, Space
	Data bit	5,6,7,8
	Stop bit	1, 1.5, 2
	Flow control	RTS/ CTS, XON/ XOFF
	Form	RJ45
	Protection	±15KV Anti-static protection
	Signal	RS232: DCD/RxD/TxD/DTR/GND/DSR/RTS/CTS, RS422: TXD+/RXD+/TXD-/RSD-/GND, RS485: Data+/Data-

Ethernet port	Rate	Auto-10/100M
	Form	RJ45
	Protection	Built-in 2KV EM isolation
Software	Protocol	ARP, IP, ICMP, UDP, TCP, PPP, HTTP, TELNET, DNS, DHCP, PAP, CHAP
	Virtual COM	Window NT/2000/XP
Environment	Operating temperature	-10 ~ 60°C
	Operating humidity	5 ~ 95%
	Storage temperature	-20 ~ 85°C
	Storage humidity	5 ~ 95%
Certification		FCC, CE
Power		AC 220V
Appearance	Material	Metal housing
	Dimension	19 inches, 1U height

### 3. Pin definition

RJ45	RS-485 HALF	RS-485 FULL	RS-422
1	DATA <sup>+</sup> <sub>2</sub> } merge	RxD+ 1	RxD+ 1
2		TxD+ 2	TxD+ 2
3	DATA <sup>-</sup> <sub>4</sub> } merge	RxD- 3	RxD- 3
4		TxD- 4	TxD- 4
5		FULL 5 } connect GND 6	FULL 5 } connect GND 6
6	GND 6		
7			
8			




**RJ45**

## 4. Product View (Appearance)



## 5. Structure Dimensions

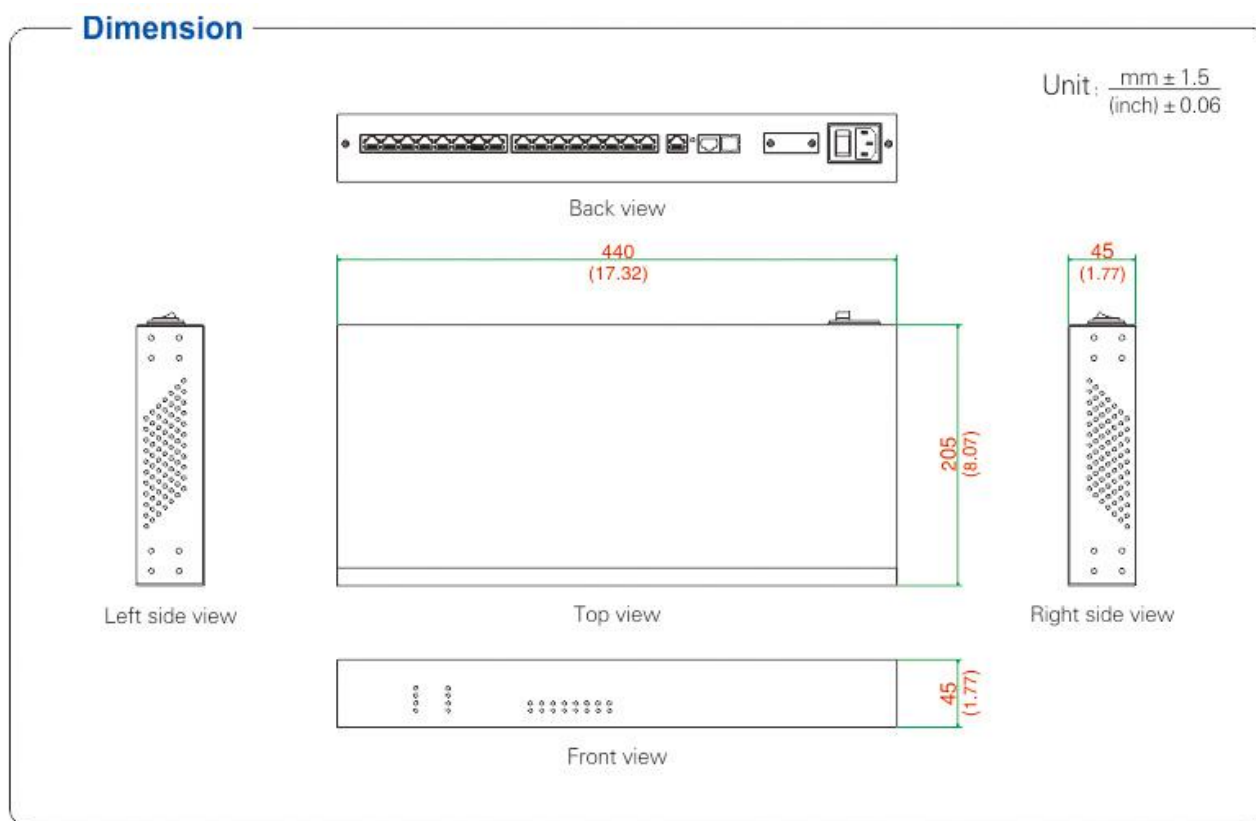

## 7.Ordering Information

Model	Signal/ Interface			Port number		Interface protection level		Operating Environment			Power	
	TCP/IP	RS-232	RS-485/422					Temperature		Humidity		
	RJ45	RJ45	RJ45	TCP/IP	RS-485 /422	TCP/IP	RS-485/422	-10~60℃	-40~85℃	5~95%	plug and play	External power
UT-6616M	√		√	1	16		±15KV ESD	√		√		220VAC