

Model: UT-212

(Product Name: RS-232 Isolated Converter)

Datasheet



UTEK TECHNOLOGY (SHENZHEN) CO., LTD.

Add: Floor 10, Building 7, Skyworth Innovation Valley, No. 8, Tangtou No.1 Road,
Shiyan Old Street, Bao 'an District, Shenzhen

Tel: +86-755-81202008

Fax: +86-755-27886083

Http: www.uotek.com

1. Overview

UT-212 RS-232 extender with optoelectronic isolation allows extending the communication distance between 2 sets of asynchronous RS-232 communication devices to 12km.

The optoelectronic isolation technology fully isolated the loop circuit between electric part and ground wire; this protects the communication devices from interference of power and ground loop circuit, surge. It changes the single port transmission into dual wire balance transmission, which increase the communication distance.

UT-212 is in mini size, there are no special requirement on the wire, and no need for external power; it is convenient to use.

UT-212 is widely used in point to point RS-232 communication, the connection between multi users terminal and host, RS-232 long distance control system, SPC exchange billing terminal, satellite receiver.

2. Major Functions & Features

- RS-232 Isolated converter


3. Technical Parameters

- Enables RS-232 transmission distance to 12km
- Balance current transmission, strong anti-jamming
- Adopts optical isolation, avoid GND circuit surge
- Isolated voltage: 2,500Vrms impulse or 500VDC
- Supports RS-232 asynchronous communication standard
- Plug & play, easy to use
- No need external power
- Use special communication cable or normal cable
- Baudrate: 57.6kbps
- Full-duplex or half-duplex, small size

4. Product View (Appearance)



5. Structure Dimensions

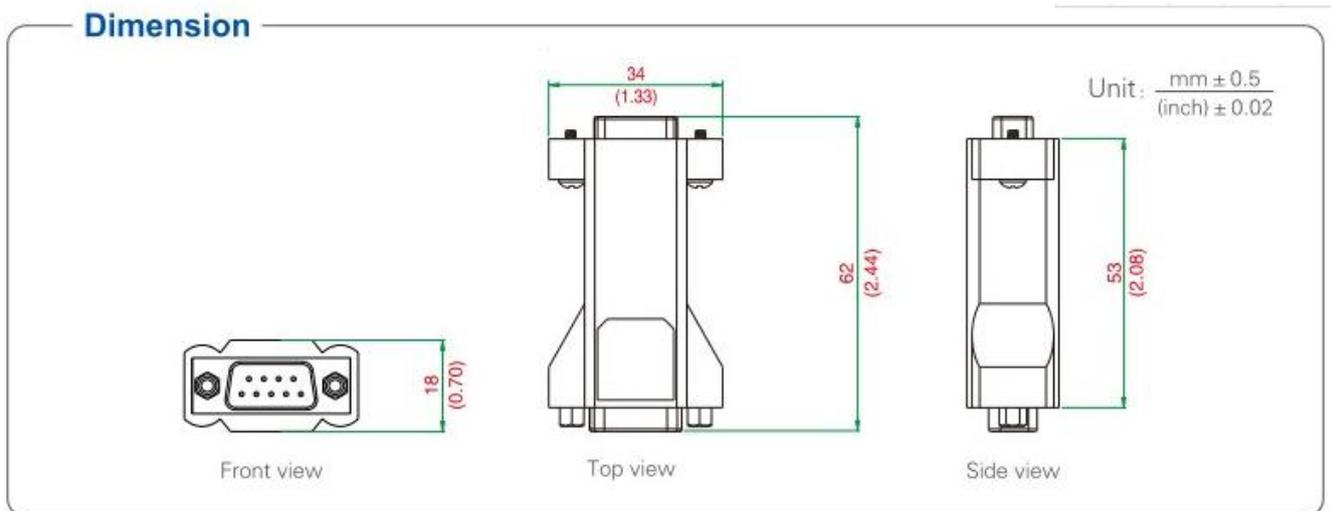

6. Ordering

Ordering										
Model	Signal/Port		Protection		Baudrate	Environment			Power	
	RS-232	RS-232	RS-232 INPUT	RS-232 OUTPUT		Temperature		Humidity	Port-Powered	External Power
	DB9 female	DB9 male				-25/70°C	-40/85°C	5-95%		
UT-212	✓	✓	±3KV ESD	±3KV ESD	300bps-57,600bps		✓	✓	✓	