

Model:UT-2003B1

USB to 8 ports RS-232 Converter

Datasheet



UTEK TECHNOLOGY (SHENZHEN) CO., LTD.

Add: Room 1001, Building 7, Skyworth Innovation Valley, No. 8, Tangtou No.1 Road, Shiyan Street, Shiyan Old Street, Bao 'an District, Shenzhen

Tel: +86-755-81202008

Fax: +86-755-27886083

Http: www.uotek.com

1. Overview

With the development of PC industry, USB interface is gradually replacing various low-speed peripheral interfaces of old PC, however, many important devices in industrial environment still use RS-232 interface design, so many users use USB to RS-232 converter to realize data transfer between PC and RS-232 devices.

The UT-2003B1 is a universal USB/RS-232 interface converter, which is compatible with USB and RS-232 standards without external power supply, and is capable of converting a single USB signal to a UART RS-232 signal, with the RS-232 side connected via a DB9 male connector. The converter is equipped with zero-latency automatic transceiver, unique I/O circuitry to automatically control the data flow direction, plug and play. It ensures that it is suitable for all existing communication software and interface hardware.

UT-2003B1 interface converter can be used for point-to-point communication connection, data communication rate 300-921.6Kbps, with power indicator and data flow indicator to indicate the fault situation, support the communication mode of USB to RS-232 conversion.

2. Major Functions & Features

- Support USB to RS-232 converter


3. Technical Parameters

- Standard: Compliant with USBV1.0, 1.1, 2.0 standard EIA RS-232 standard
- USB signals: VCC, DATA+, DATA-, GND, FG
- RS-232 signal: DCD RXD TXD DTR GND DSR RTS CTS RI
- Working mode: asynchronous work, point-to-point communication mode
- Direction control: automatic data flow control technology is used to automatically identify and control the direction of data transmission
- Baud rate: 300-921.6Kbps, automatic detection of serial signal rate
- Transmission distance: RS-232 end 5m, USB port no more than 5m
- Interface protection: $\pm 15KV$ electrostatic protection
- Interface form: USB end of the Class B interface female, DB9 male connector connection
- Signal indication: light power (PWR) transmit (TXD) receive (RXD)
- Transmission medium: twisted pair or shielded wire
- Dimension: 490mmX201mmX43mm
- Operating environment: -40~ 85°C, relative humidity 5~ 95%
- Support Win98/Win2000/WinXP/Vista/Win7/Linux etc.
- External power supply: AC220V/50Hz


4. Hardware definition and initial settings

- DB9 male: RS-232 output signal and terminal pin assignment

| DB9 (PIN) | RJ-45C Signal interface |
|-----------|---------------------------------|
| 1 | Protection grounding |
| 2 | Receiving data SIN(RXD) |
| 3 | Transmitting data SOUT(TXD) |
| 4 | Data terminal preparation (DTR) |
| 5 | GND |
| 6 | Data device preparation (DSR) |
| 7 | RTS |
| 8 | STS |
| 9 | RI |

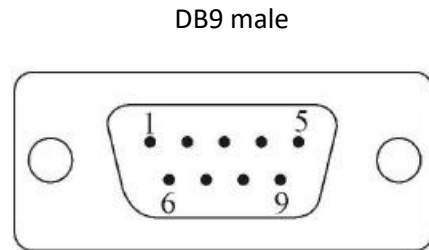


- USB-B Female: USB signal input and pin assignment diagram

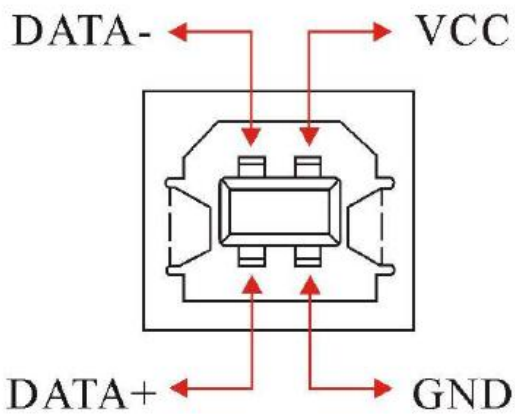

5. Product View (Appearance)



6. Structure Dimensions

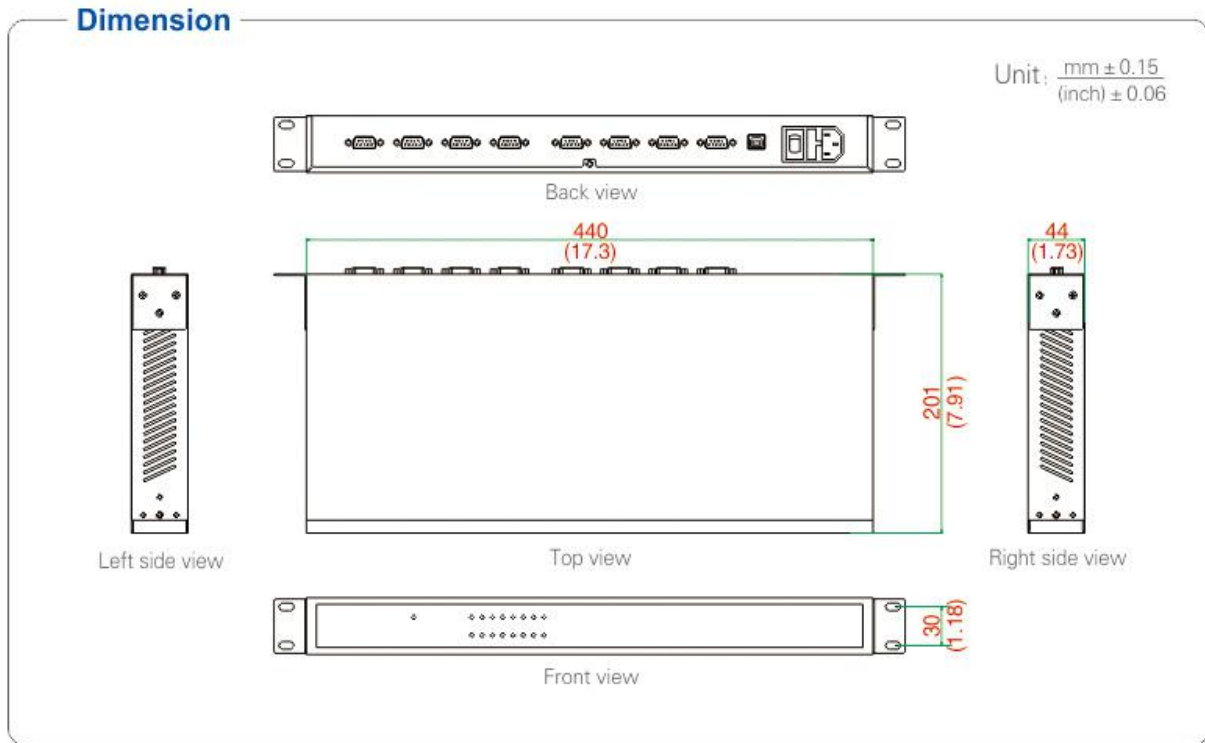

7. Ordering Information

| Model | Signal/ Interface | | | Protection level | | Baud rate | Operating Environment | | | Power | |
|-----------|-------------------|----------|------------|------------------|------------|----------------------|-----------------------|----------|----------|---------------|----------------|
| | USB | RS-232 | RS-485/422 | | | | Temperature | | Humidity | | |
| | USB B type | DB9 male | | RS232 | RS-485/422 | | -25~70°C | -40~85°C | 5~95% | plug and play | External power |
| UT-2003B1 | √ | √ | | ± 15 KV ESD | | 300bps-921.6 kbps | | √ | √ | | 100-240 VAC |